


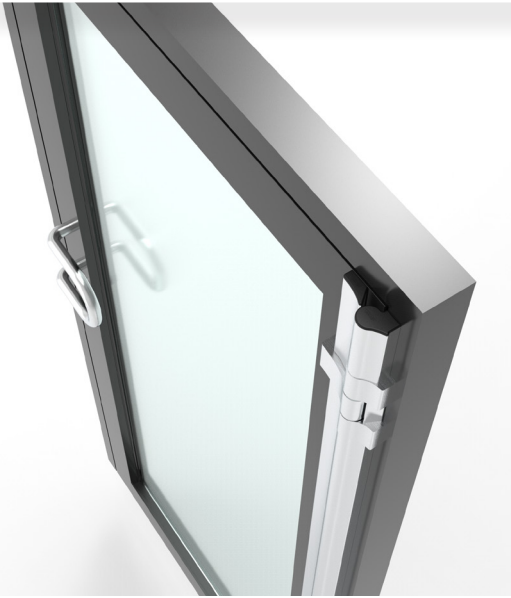

Athmer finger protection - secondary closing edge/hinge side for surface-mounted hinges on aluminium doors

Protective profile BA-28⁺

One product for different surface-mounted hinges

- for manual/power operated, flush aluminium doors
- reliable protection of the gap between door leaf and frame on the hinge side
- stageless adjustable for pivot points from 20 – 36 mm
- no on-site measurement necessary

Attractive design with more safety

- tamper-resistant fixing with concealed screws
- no abutting edges due to end caps, the radius is less than 2 mm
- compliance with max. 4 mm air gap according to DGUV and 8 mm to EN 16005

Simple, quick and safe assembled without costly spacer rail

- align the profiles in line with the hinges, no marking necessary
- press on the profiles tool-free and position with adhesive pads
- fixing without pre-drilling and lowering of the fixing holes

Safe and fine adjustment to avoid shearing points


- profiles variable & stageless adjustable with patented height adjustment
- oblong holes for secure mounting and 2D fixing element for firm fit
- profiles can be dismantled for maintenance purposes on the door



Safety profiles with end caps




Height-adjustable 2D fixing element

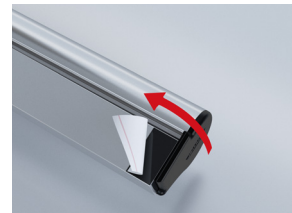

Adhesive pads for tool-free positioning

Align. Press on. Fix. Done!

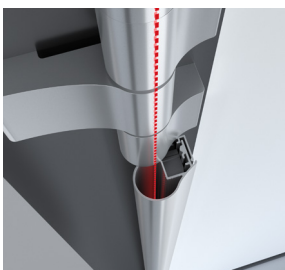

Align.




Press on.



Fix.



Done.

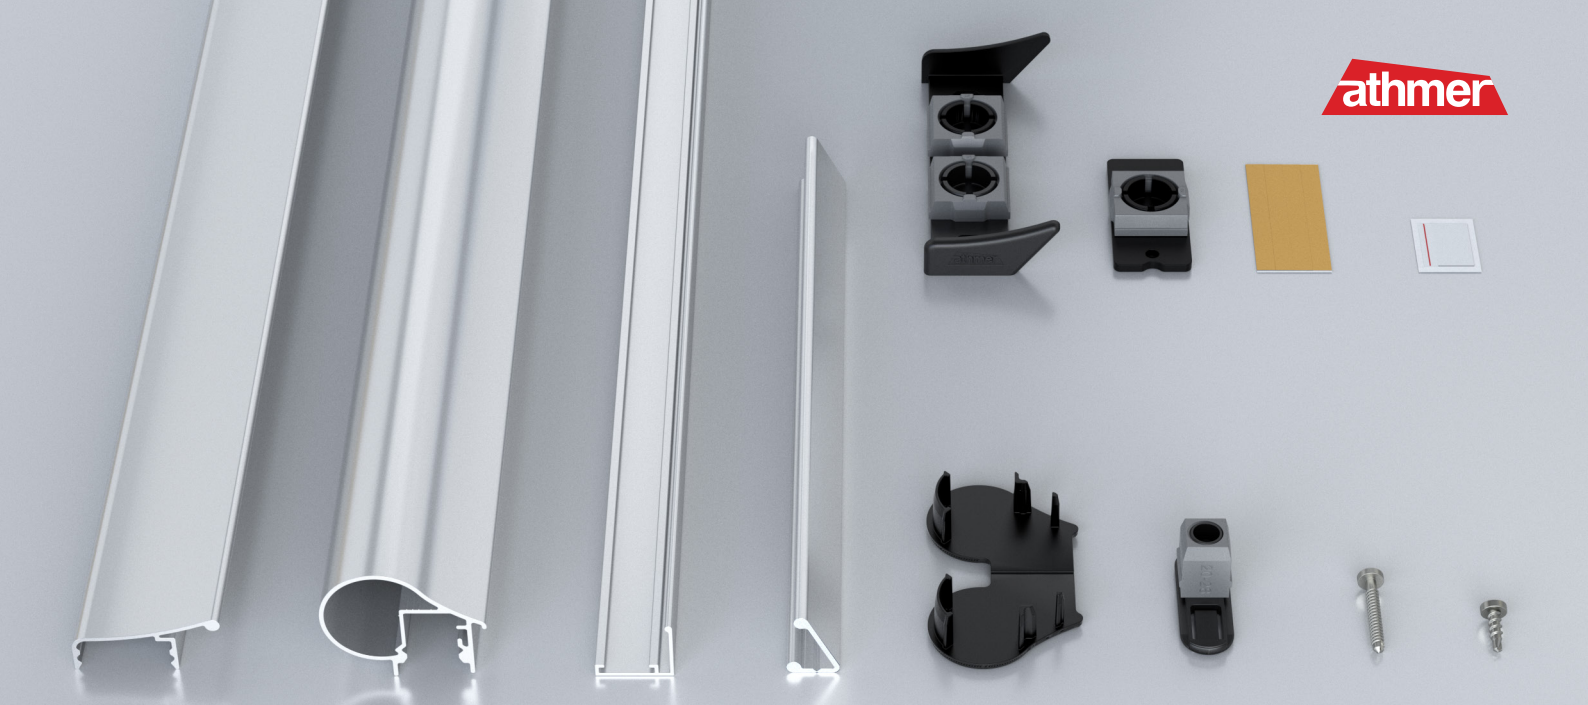


Technical data

- ▢ opening angle up to 170°
- ▢ for 20 – 36 mm pivot points
- ▢ high-quality aluminium profile, maintenance-free
- ▢ surface wipe disinfection tested
- ▢ for retro fitting on all aluminium doors with surface mounted hinges, for manual & power operated doors and for fire & smoke resistant doors (in accordance with the manufacturer supported by Athmer)


Included in delivery

- ▢ profiles and suitable fixing materials for cutting and installing on site
- ▢ standard colour: silver anodised C-0, individual colours available
- ▢ delivery length: 1,900 mm (can be shortened), for use with doors in nurseries and power operated doors up to 2,400 mm
- ▢ special lengths on request
- ▢ **NEW:** can be ordered to size with measurement sheet, saving time during installation
- ▢ installation video and measurement sheet available via www.athmer.com/ba28-plus


Application

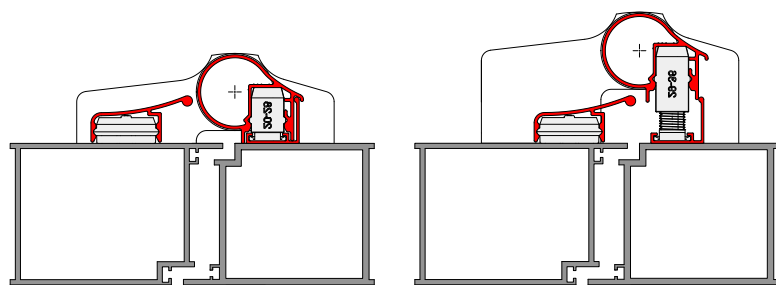

BA-28+ with different surface mounted hinges

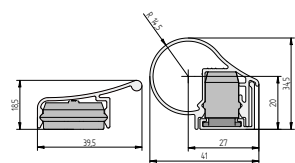

Profile door leaf



Outer profile with basic profile



Angle profile



Measurement sheet



Installation video